

DOLPHINFLEX BLACK COMPOSITE HOSE

Dolphinflex-BLACK

APPLICATION


This high quality Dolphinflex® Black hoses are used for suction and discharge of general chemicals, oils, solvents, and diesel.

Ship to shore, Tank truck, Railcar, Petrochemical plant, Loading and unloading of chemical cargoes



CONSTRUCTION

Inner wire	Stainless steel 316 / PP coated wire
Outer cover	Polyester PVC coated Black color
Lining	Polypropylene fabrics
Outer wire	Stainless steel 316 / Galvanized steel

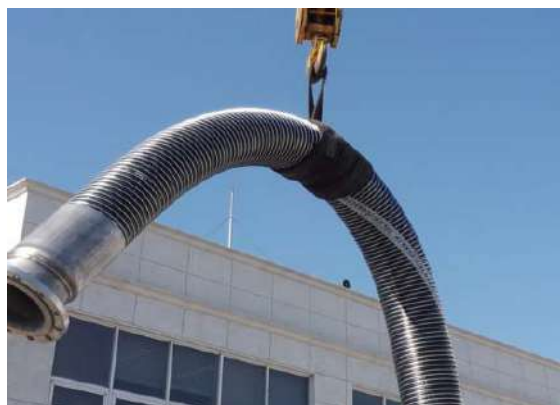

CHARACTERISTIC

Max. elongation	10% on proof pressure
Min. burst pressure	5x working pressure (Safety factor 5:1)
Temperature range	-30°C to +80°C
Electrical resistance	≤ 2.5 Ohm/m for under 50mm (2") ≤ 1.0 Ohm/m for over 50mm (2")

REGULATION

EN13765 : 2010 (Thermoplastic multi-layer (non-vulcanized) hoses and hose assemblies for the transfer of hydrocarbons, solvents and chemicals. Specification)

SPECIFICATION

BORE DIAMETER		MAX. WORKING PRESSURE		BEND RADIUS		MAX. WEIGHT		MAX. LENGTH	
INCH	MM	BAR	PSI	INCH	MM	KG/M	LBS/FT	M	FT
1	25	10.5	150	7.9	200	1.4	0.93	21	69
1.5	40	10.5	150	7.9	200	1.6	1.07	21	69
2	50	10.5	150	8.9	225	3	2	25	82
2.5	65	10.5	150	8.9	225	3	2	25	82
3	80	14	200	14.0	350	5.2	3.47	30	98
4	100	14	200	16.0	400	7.8	5.2	30	98
5	125	14	200	23.0	575	10	6.67	30	98
6	150	14	200	23.0	575	12	8	30	98
8	200	14	200	31.5	800	18.5	12.3	30	98
10	250	10.5	150	39.5	1000	23.5	15.67	25	82
12	300	10.5	150	47.5	1200	30	20	15	49